



Secura Retaining Wall System Specification Sheet

Secura Grand provides housing developers, landscapers, civil engineers and home owners with the most attractive and cost-effective solution to their retaining wall or planter-building requirements.

Quick and easy to use SECURA walling is a dry-laid system offering quality in appearance, materials and design flexibility.

Secura Grand has two voids in the block. We recommend filling these voids using graded granular filter, with a maximum stone size 20mm. These voids should be filled before building the next row.


- Fast and simple wall building.
- Reliable, as-built weight meets performance every time.
- No thin walls to damage in transit or building. Guaranteed durability - Including freeze/thaw.
- Blended colours - Subtle colour blends, which create a warm natural appearance and compliment the paving range
- Textures - There is a special process which produces the unique timeless, rugged appearance of natural stone.



Secura is ideally suited to larger landscaping schemes such as housing developments, roads, commercial property etc. It can be used as a gravity walling system or, combined with Geogrid, to form reinforced soil walls for retaining structures. A single face sized dry-laid block system with split or aged finish. This larger block offers quicker build and a more modern feel, with wide appeal.

Secura Grand Specification

Block size: 400mm x 230mm x 200mm
 No. /bale: 48
 Wight /bale: 1248kg
 Colours: Heather, Bracken & Slate
 Manufactured to: BS EN 1338:2003
 Installation to: BS 7533-3:2005

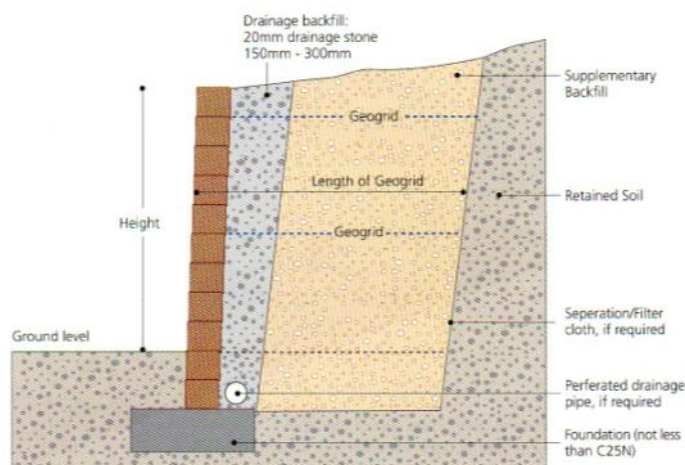

Specialists in Geosynthetics & Erosion Control